


Panattoni Park Stříbro





PERFECT ACCESS FROM EXIT 107 GREAT VISIBILITY FROM D5 MOTORWAY

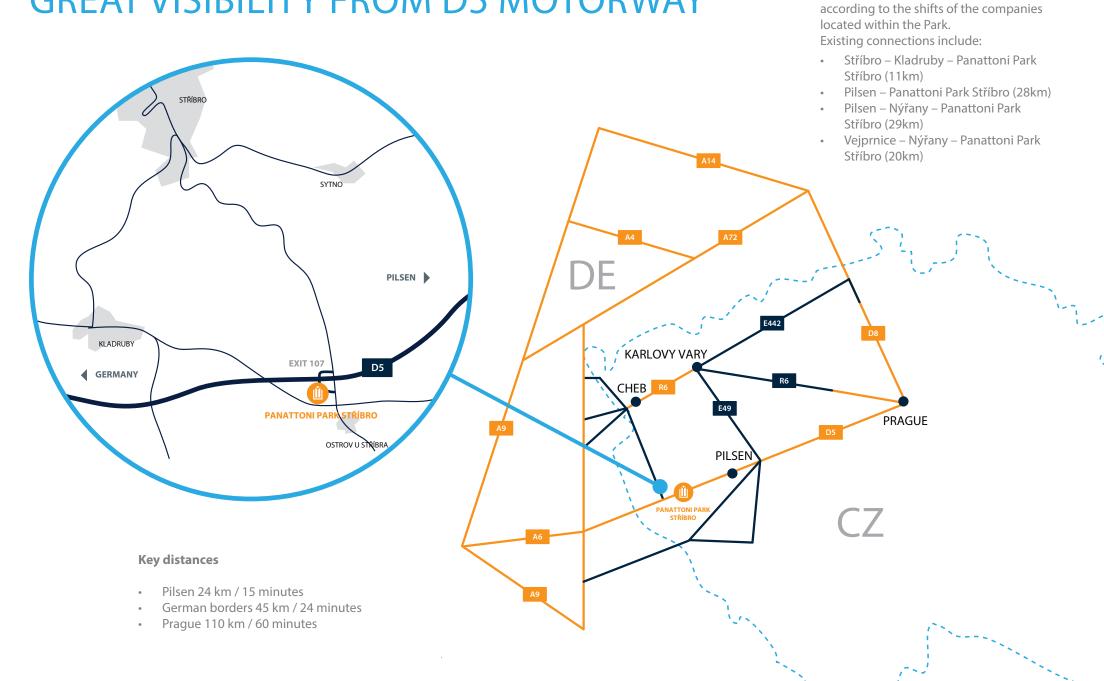

Bus connections

Panattoni Park Stříbro is serviced by

a bus transportation scheduled precisely

STANDARD TECHNICAL SPECIFICATION

SUPPORTING STRUCTURE

- · Pad or pilot foundations, insulated plinth panels up to 30cm above floor
- Prefabricated concrete columns in 12 x 24 m grid or per layout
- · Prefabricated concrete or steel roof beams, clear height of 10m

FLOOR

- · Fibre reinforced concrete floor, PE membrane, cut joints, 18cm thick, surface treated with hardener
- Load capacity of 50 kN/sqm, 60 kN point load
- Flatness according to DIN 1822, table 3, line 3

ROOF

- · Corrugated steel sheets, mineral wool insulation, PVC membrane
- Free load capacity of 15 kg/sqm for clients installations
- Min. 2% of skylights in warehouse area
- · Syphonic drainage system, emergency overflows

FACADE

- Horizontal sandwich panels with mineral wool insulation
- Prefabricated concrete façade around docks to approx. 4.5m height
- Double glazed windows in offices with insulated PVC profiles

DOCKS

- 1x electrically operated 3 x 3.2 m dock for each 1 000 sqm of hall
- Each dock equipped with hydraulic leveller, 60 kN capacity, PE shelter, wheel guides
- 1x electrically operated 3.5 x 4.2 m drive-in gate for each 5 000 sgm of hall



- ESFR sprinklers under roof, FM Global certified tank and pumps
- 200 lux LED lighting (excluding influence of clients installations) 1x 630 kVA dry transformer station per each 25 000 sgm of hall
- code for manufacturing (assembly)
- 300 lux LED lighting (excluding influence of clients installations)
- · Increased percentage of skylights area
- Aluminium entrance door with canopy to entrance lobby
- Tiles, carpets or PVC floor surfaces, suspended mineral
- Social rooms with ceramic fixtures, wall tiles, and basic accessories
- PVC cable trays below windows, 2x 220V socket per work place
- · Server room with 2 split units and antistatic PVC floor
- Top cooling

- 2m high mesh fence, entrance barriers and manual gate
- Green areas with grass, brushes, and trees

Development concept

Total built-up area

236 908 sqm

Building

Planning permit in place

00.040

12 m x 24 m

10 m

200 lux

5t/sqm

Building G Building permit in place

WAREHOUSE

Column grid Clear height


ESFR sprinkler system
Light intensity in the hall

Skylights min

Floor loading

OFFICE PREMISES

Clear height Light intensity 2,7 m 500 lux

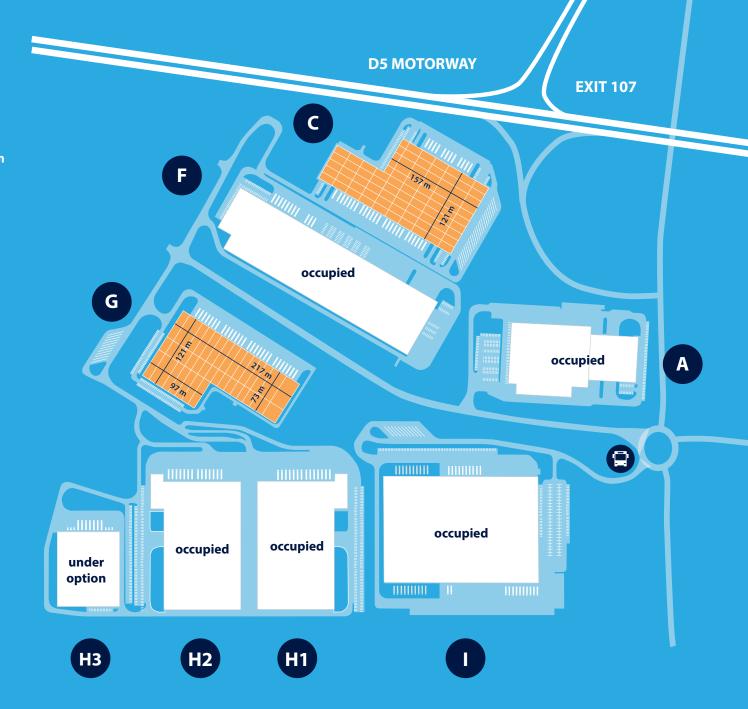





Panattoni Worldwide International vision. Local focus.

With an expansive international platform, Panattoni Development Company, Inc. specializes in industrial, office and build-to-suit development. Our 31 offices in the United States, Canada and Europe are responsible for the development of approximately 30 million square meters. Each office is rooted in the local community with strong partnerships that produce the best results for our clients in each region. You can find us in Poland, Great Britain, the Czech Republic, Slovakia, Germany and Luxembourg.

CZECH REPUBLIC

Panattoni Europe

Slovanský dům, Na Příkopě 859/22 110 00 Prague 1 Czech Republic

czinfo@panattoni.com Tel: +420 225 341 321 www.panattoni.cz www.panattonieurope.com/cz

SLOVAKIA

Panattoni Europe

Palisády 55 811 06 Bratislava Slovakia

skinfo@panattoni.com Tel: +421 2 3231 0560 www.panattoni.com www.panattonieurope.com/sk